

The logo for ISL, featuring the letters 'i', 'S', and 'L' in white on a blue background, with a small green 'e' to the right.

POLYESTER



Thanks to Speed Group's expertise and the highest quality raw materials, the **ISL** range is the only one offering the diameters and properties adapted for your needs. The right product for the right application.

**ISL<sup>e</sup>** in polyester for a higher rigidity and **ISL<sup>a</sup>** in polyamide for more suppleness.


> **An environmentally neutral product**

Does not leech any substances  
100% recyclable

> **An effective and durable use**

We tested the **ISL<sup>e</sup>**'s effectiveness, solidity and longevity with independent laboratories

Diameters (mm)	1,8	2,2	2,6	3
Meters / kilograms	266	188	135	101
Breaking load (kg strength)*	140*	209*	292*	389*
Longevity	15 years	15 years	15 years	15 years
Materials	PET	PET	PET	PET


\* Measurement realized by ifth

The ISL logo, with 'i', 'S', and 'L' in green and 'e' in white on a blue background.


Innovative Support Line

BY SPEED GROUP


## Efficient: Elasticity line test\*

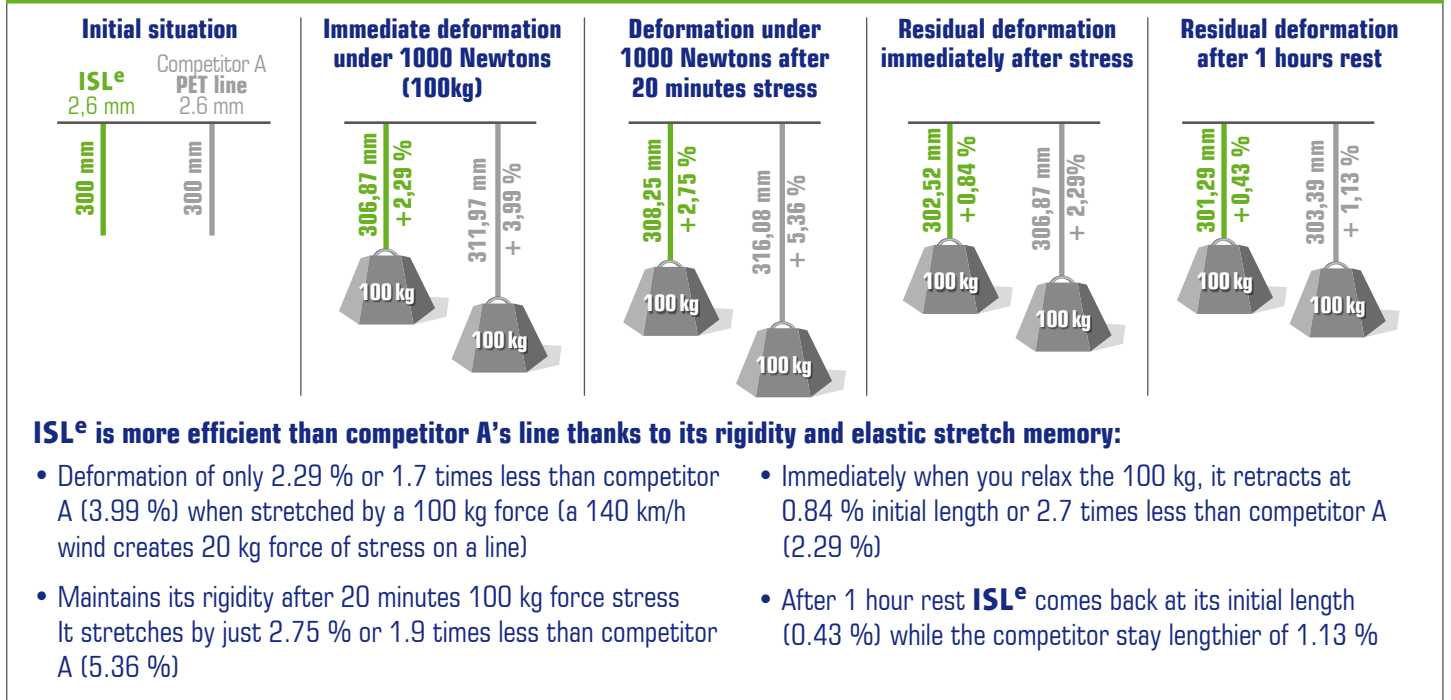

## Strong: breaking load\*

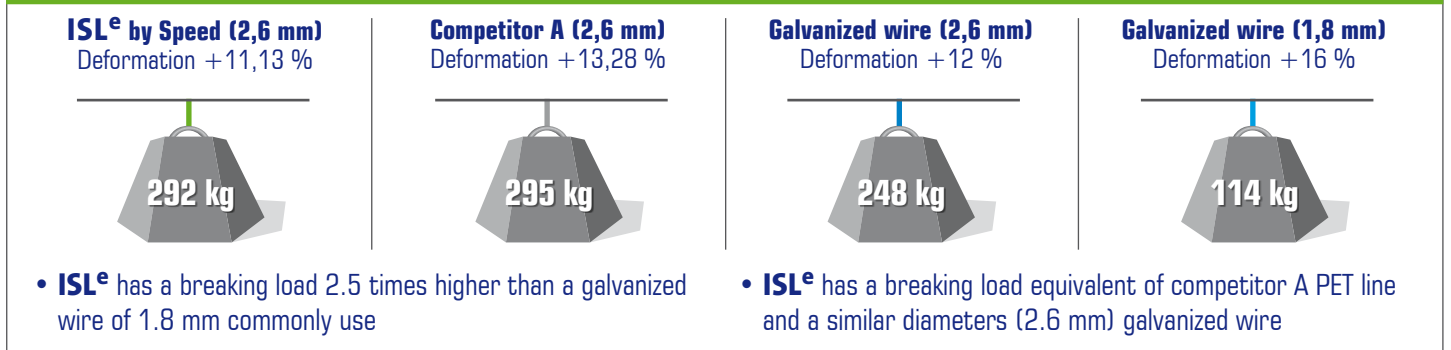

## Longevity: ageing test\*\*

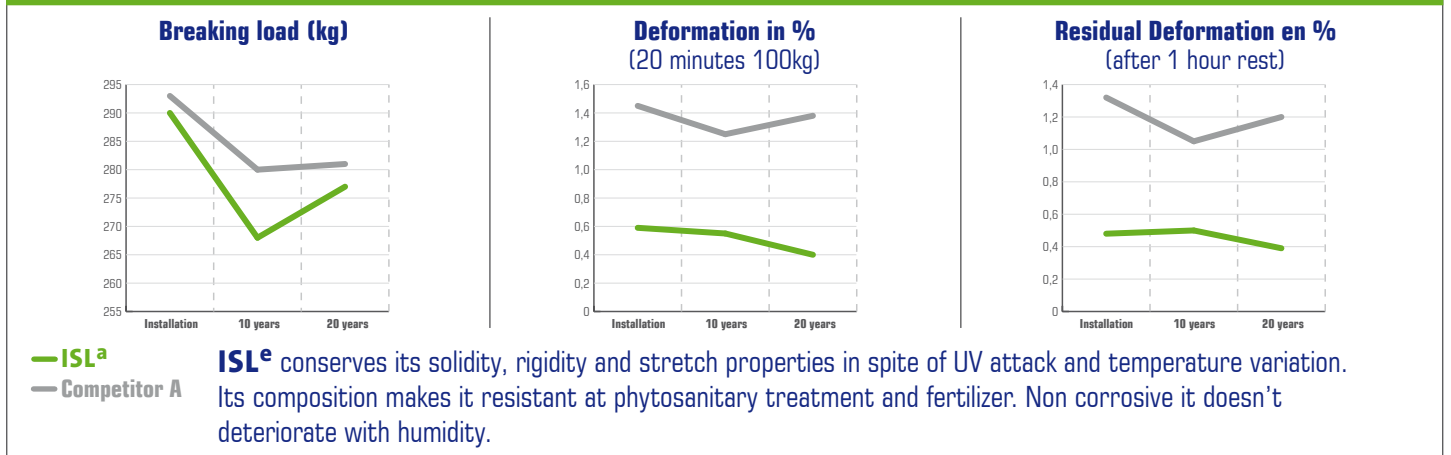

\* Measurement realized by

\*\* Measurement realized by the National center of photoprotection evaluation, artificial ageing realized on SEPAP 12-24 60°C box, by UV exposition during 1500 hours (10 years) and 3000 hours (20 years)